


Baby Transit Solo Runner's Stroller

Thank you for choosing the TransIt Solo Runner's Stroller.

This full featured stroller includes a reclining seat with 5-point restraint harness, an adjustable sun canopy with viewport window, front hand brake, front and rear parking brakes, alloy frame, and quick release wheels. Correct assembly of the stroller is vital to its safe operation. Please read these instructions carefully. Failure to follow these instructions could result in serious injury to you or your child. Retain these instructions for future reference.

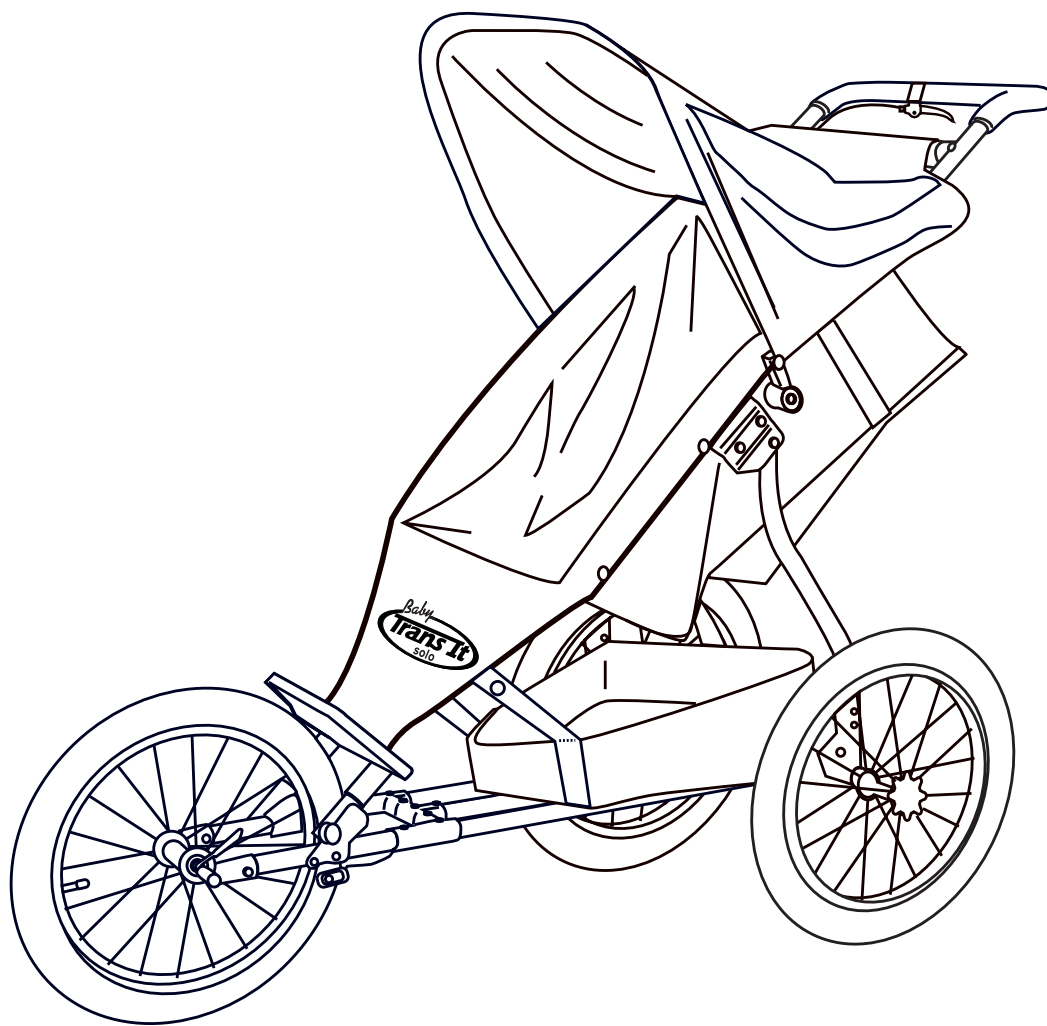

Tools required

Phillips screwdriver


Assembly

1. Release the buckle on the strap that secures the stroller when folded. This strap can be stored in one of the Transit Stroller's 3 pockets (see figure 1).
2. Remove the protective foam packing from the lock tabs (see figure 2).
3. With the Stroller laying on the ground, unfold the handle so that the seat harness is visible (see figure 3).
4. Lift the handle until the lock tabs are aligned with their respective slots. Push them until they both snap into place (see figure 4).

Important

Make sure the tabs are locked after pushing them into the slots.

5. Remove the protective plastic sleeves from the uprights (see figure 5).
6. Locate the black metal latches on the sides of both forks. Rotate them until they lock over the silver posts on the handle. You will hear a "click" when they are correctly engaged (see figure 6).
7. Locate the two black straps at the bottom rear of the seat. Snap the straps to the corresponding uprights (see figures 7 and 8).

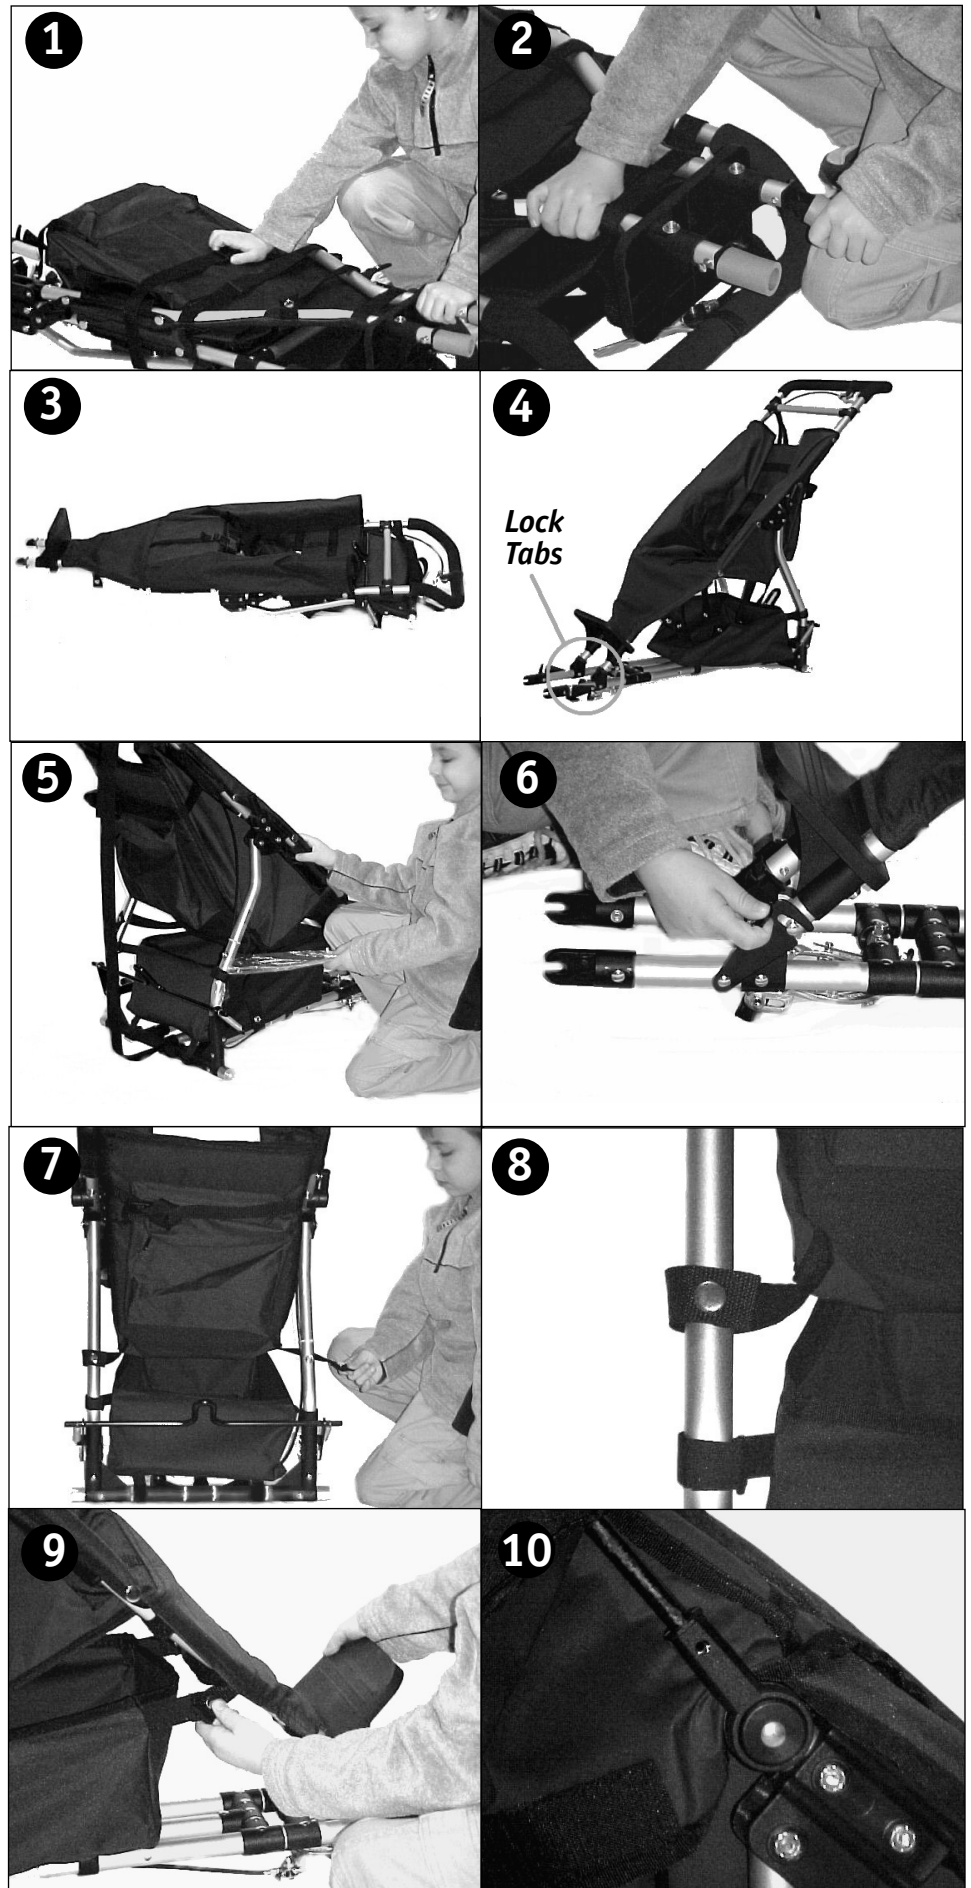

8. To secure the under-seat basket, snap the straps at the front of the basket to the snaps behind the "TransIt" Logo(see figure 9).
9. Using a phillips screwdriver, remove the screws at the end of each canopy leg.
10. Stand behind the Stroller. With the clear plastic window on the under side of the canopy and the hook and loop toward the handle, insert the canopy legs into the plastic mounts on each side of the handle (see figure 10).
11. Replace the screws at the end of each canopy leg, and tighten securely (see figure 11).
12. Attach the canopy flaps to the top and sides of the handle using the hook and loop fasteners.

Important

Make sure to unsnap all 4 under-seat basket snaps before folding.

Attaching the Wheels

1. Locate the wheel with the knob marked "L" for left. Stand behind the stroller, and turn it onto its right side.
2. Insert the threaded wheel axle into the tube at the the base of the upright. Using the knob, screw the axle into the tube COUNTER CLOCKWISE until it is tight (see figure 12).
3. Locate the wheel with the knob marked "R" for right. Stand behind the stroller, and turn it onto its left side.
4. Insert the threaded wheel axle into the tube at the base of the upright. Using the knob, screw the axle into the tube CLOCKWISE until it is tight.
5. Locate the front wheel. Before installing the front wheel, open the quick release lever on the front brake caliper, by flipping the lever toward the rear of the stroller (see figure 13). This opens the calipers to facilitate wheel installation or removal.
6. Stand at the front of the Stroller, and tip it onto its back. Insert the front wheel in the open fork ends.
7. Tighten the nut on the front wheel quick release skewer so that the lever end requires enough force in closing that it leaves an imprint on your hand. If the skewer lever closes too easily, open the lever and further tighten the nut side of the skewer one or two additional turns. Repeat this process until the lever requires enough force in closing that it leaves an imprint on your hand. When fully closed, the quick release lever should be flush with the fork (see figure 14).



Note

- A. *If you are not familiar with the operation of front wheel quick release skewers, and are not sure whether the front wheel is correctly installed or securely tightened, ask for assistance at a local bike shop.*
 - B. *Check the inflation of the three tires. They should be inflated to 35 PSI.*
8. **IMPORTANT:** Be sure to close the brake caliper quick release lever once the front wheel is installed, by flipping the lever toward the front of the Stroller. The brake will not operate properly unless the brake quick release lever is fully closed.


Brakes

Your TransIt Stroller comes with two brakes: A hand operated front brake (which also functions as a parking brake), and a foot operated rear parking brake.

1. To stop forward or backward progress of the Stroller, squeeze the brake lever toward the handle.
2. To engage the hand operated front parking brake, squeeze the lever until it nearly touches the handlebar. While squeezing the lever, depress the lever-lock button. While the lever-lock button is depressed, release the brake lever (see figure 15).
3. To release the front parking brake, squeeze the lever to the handle until the lever-lock button clicks free.
4. To engage the foot operated rear parking brake, push down on the "U" shaped portion of the rear brake rod with your foot. Make sure the rod has locked into the slots of both the right and left hubs (see figure 16).
5. To release the rear brake, lift up on the "U" shaped portion of the rear brake rod with your foot.

Important

Always use both brakes when the Stroller is not being pushed. Always keep an eye on your stroller and never leave your child unattended.

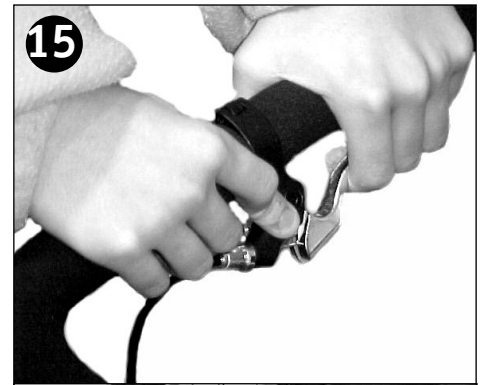

Harness

Proper harness adjustment is important to your child's safety. The TransIt Stroller's harness system easily adjusts to fit children of different sizes and ages comfortably and securely. Always watch your children, and never leave them unattended. The harness is designed around a convenient double sided buckle, which allows you to open both sides and release the shoulder straps (see figure 17). The harness shoulder straps have two different height adjustments.

1. To adjust the shoulder strap higher, undo the locking hooks from the buckle, and pull the strap through the loop mid way up the seat. Reconnect the hooks to the buckle (see figures 18).
2. Once the shoulder strap height is properly adjusted, use the tri-glides (located on the belt and straps) to adjust the seat belt and shoulder strap tension (see figure 19).

Important

If you can slip more than one adult sized finger between the belt and your child, the belt is too loose. Tighten the straps and check again.

Additional Features

Wrist strap: Always slip the wrist strap around your wrist when using the Stroller. If you should trip or stumble, the wrist strap will prevent the Stroller from rolling away (see figure 20).

Sun Canopy: An adjustable window in the sun canopy allows you to keep an eye on your child. Use the hook and loop straps to keep the window flap fully open.

Reclining seat: Use the buckle and strap on the back of the seat near the pocket to recline the seatback (see figure 21).

Pockets: There is a pocket located on the back of the seat, and a basket located under the seat. To prevent tipping, it is important that you not carry more than 12 pounds between the pocket and the basket (see figures 22 and 23).



**Contact our Technical Service Department with any
questions at 1-800-727-2453 (9am to 6pm EST)
or online at PerformanceBike.com**



**Performance Inc.
One Performance Way
Chapel Hill N.C. 27514
PerformanceBike.com**

PERFORMANCE and the Flying P Logo are registered marks of Performance Inc.