



07\_Hurricane ATB/G Mini Pump\_Card  
Yellow Keylines DO NOT PRINT  
Card size: 5.5625" w x 15.75" h  
Art @ 100%




White



Pantone 485 CVC  
C0 M95 Y100 K0




Pantone 484 CVC  
C0 M95 Y100 K29




Rich Black  
C=60 M=40 Y=40 K=100

 **Hurricane™**

 **Precise, easy-to-read gauge ensures accurate inflation pressure**

 **Large diameter aluminum barrel efficiently inflates mountain tires**

 **Folding "T" handle provides comfortable grip and better leverage**

 **Reversible head quickly converts for Presta or Schraeder valves**


 **Frame mounting bracket and hardware included**

 **176 g**


**ATB/G mini pump**

**INSTRUCTIONS FOR TIRE INFLATION:**


1. Identify valve type. Remove threaded cap and position rubber gasket and plastic pin as necessary. See Figure 1.
2. Remove dust cap from tire valve. For Presta valves, unscrew metal locking barrel at tip of valve. Depress tip of either type valve to ensure valve doesn't stick and to blow out any dirt or contaminants.
3. Press pump head onto tire valve stem as far as it will go and lift thumb lock lever to the locked position. See Figure 2.
4. Inflate tire to desired pressure. Do not inflate beyond maximum recommended inflation pressure printed on tire sidewall.
5. Release thumb lock lever and remove pump head from valve stem.
6. For Presta valves, screw down locking barrel at valve tip. Replace valve stem dust cap.

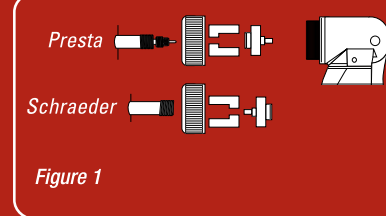

*Figure 2*



*Figure 3*

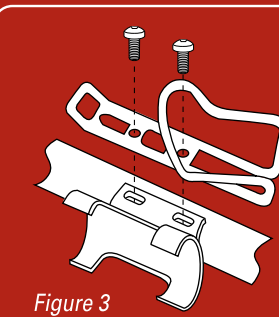

**BRACKET INSTALLATION:**

1. Attach bracket to frame using water bottle cage braze-on bolts. See Figure 3. Press pump into bracket until it snaps securely in place.

40-0256



Made in Taiwan



PLEASE RECYCLE