

Forté Classic Road Cleats


Thank you for choosing Forté Classic Road Cleats. These cleats are compatible with Forté Classic and Forté Classic Mg Road Pedals.

⚠ WARNING

- Ensure that cleats and pedals are free of debris, and that cleat bolts and pedals are tightened securely.
- Check cleats for wear before every ride. Cleats that are badly worn may impair release from the pedals, and should be replaced. Readjust binding tension after changing cleats.
- These cleats are not compatible with LOOK® brand road pedals.

Cleat Attachment

1. Push the rectangular black rubber traction piece into the recessed opening. Orient the traction piece so that the taller end is positioned at the rear of the cleat. (see Figure A).
2. Lightly grease the screws and insert them through the rectangular washers. Place the textured surface of the plastic cleat against the sole of the shoe.
3. Insert a screw and washer into one of the recessed rectangular cleat openings. Tighten enough to hold the cleat in place. Repeat for all screws and washers. (see Figure B).
4. Center the cleat under the ball of the foot (see Figure C) by sliding the cleat forward or rearward along the cleat mounting slots. The cleat can also be adjusted a few millimeters from side to side.
5. Tighten the cleat bolts securely with a flat head screwdriver.
6. Cleat position can be fine-tuned during test rides by loosening the cleat bolts, repositioning the cleat, and retightening the cleat bolts. Always ensure the cleat bolts are tightened securely before riding.

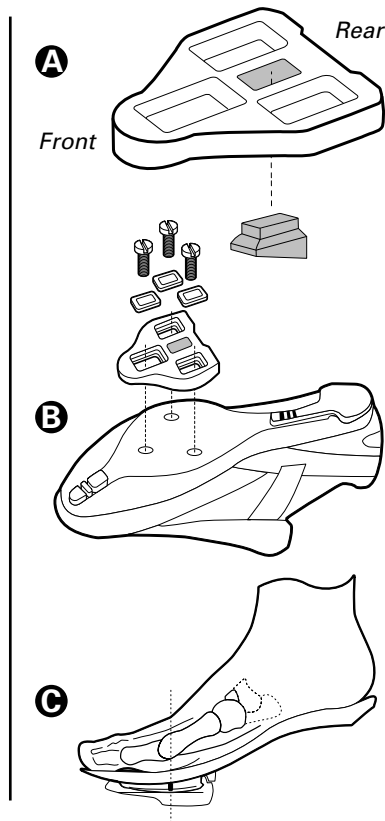

Performance, Inc.
One Performance Way
Chapel Hill, N.C. 27514
1-800-727-2453
Made in Taiwan
www.performancebike.com

PERFORMANCE and the Flying P Logo are registered marks of Performance, Inc.

Performance Tech Support 1(800)727-2453
9am-6pm EST Monday-Friday

Forté Classic Road Cleats


Thank you for choosing Forté Classic Road Cleats. These cleats are compatible with Forté Classic and Forté Classic Mg Road Pedals.

⚠ WARNING

- Ensure that cleats and pedals are free of debris, and that cleat bolts and pedals are tightened securely.
- Check cleats for wear before every ride. Cleats that are badly worn may impair release from the pedals, and should be replaced. Readjust binding tension after changing cleats.
- These cleats are not compatible with LOOK® brand road pedals.

Cleat Attachment

1. Push the rectangular black rubber traction piece into the recessed opening. Orient the traction piece so that the taller end is positioned at the rear of the cleat. (see Figure A).
2. Lightly grease the screws and insert them through the rectangular washers. Place the textured surface of the plastic cleat against the sole of the shoe.
3. Insert a screw and washer into one of the recessed rectangular cleat openings. Tighten enough to hold the cleat in place. Repeat for all screws and washers. (see Figure B).
4. Center the cleat under the ball of the foot (see Figure C) by sliding the cleat forward or rearward along the cleat mounting slots. The cleat can also be adjusted a few millimeters from side to side.
5. Tighten the cleat bolts securely with a flat head screwdriver.
6. Cleat position can be fine-tuned during test rides by loosening the cleat bolts, repositioning the cleat, and retightening the cleat bolts. Always ensure the cleat bolts are tightened securely before riding.

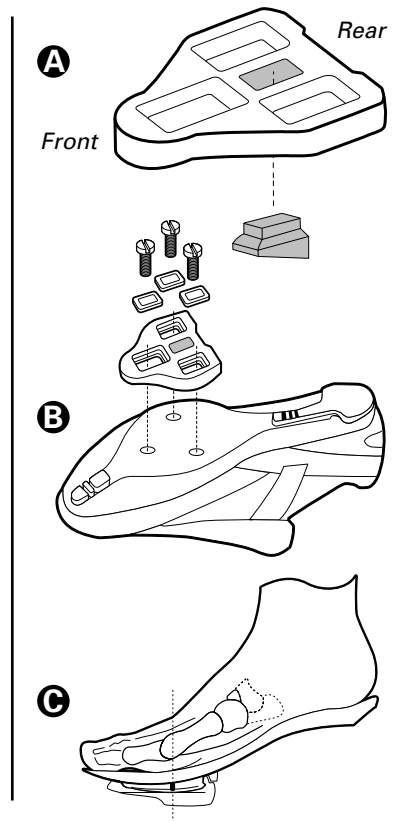

Performance, Inc.
One Performance Way
Chapel Hill, N.C. 27514
1-800-727-2453
Made in Taiwan
www.performancebike.com

PERFORMANCE and the Flying P Logo are registered marks of Performance, Inc.

Performance Tech Support 1(800)727-2453
9am-6pm EST Monday-Friday