


P-220 Mini Roof Kit

(Quantities) Parts List

- (2) 7893 32" Joining Bar
- (4) 5801 Bar Housing Assembly
- (2) 5802 Adjusting Block
- (4) 7330 End Caps
- (4) 5740 $\frac{3}{8}$ " T-Knobs
- (2) 5729 $1\frac{1}{4}$ " T-Knobs

Assembly

- 1) Determine if your car has "Aero" doors with internal raingutters or not. "Aero" door cars have doors that wrap up into the roof (examples: Ford Tempo '83 or newer T-Bird, Dodge Lancer, '84 or newer Honda Civic). If you have an "Aero" door car, use "Aero door hook (see "changing hooks").
- 2) Remove door hooks from two of the support pads and install with the protective sleeves on the P-220 adjusting blocks (Refer to XPORI instruction sheet).
- 3) Loosely thread the $\frac{3}{8}$ " T-knobs into the bar housings, and the $1\frac{1}{4}$ " T-knobs into the adjusting blocks.
- 4) Slide a bar housing onto each end of both XPORI bars as shown.
- 5) Slide support pads onto each end of both XPORI bars outside of each bar housing. Put on the XPORI end caps.
- 6) Slide the adjusting blocks onto the 32" bars, and tap the end caps into each end of them.

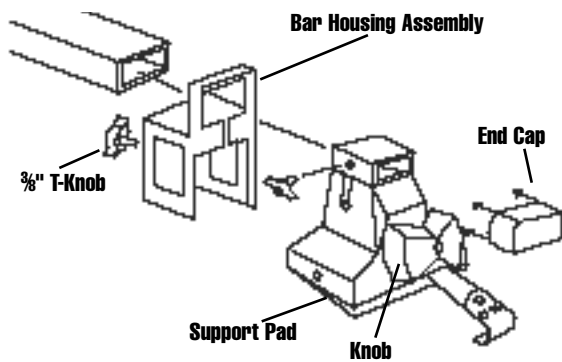

Mounting

- 1) Clean roof where support pads rest.
- 2) Place XPORI racks on roof from 24 to 30 inches apart with the rack without door hooks to the rear of the roof. Attach the front rack according to the XPORI instruction sheet.
- 3) Slide the 32" joining bar through bar housings running front to back. Position the adjusting blocks so they attach as far to the rear as possible on your roof and tighten all T-knobs.
- 4) Tighten the adjusting block locking knob clockwise until rack is secure on roof. Then go back and retighten T-knobs.
- 5) Check and retighten all knobs and screws after loading, and periodically during travelling.

NOTE: Refer to P-1401 for full XPORI instructions.

Performance Limitations of Liability

This rack has been designed to attach securely to the automobile listed in our rack-to-car guide. Proper attachment is essential and is beyond the control of the manufacturer. The rack must be attached in strict compliance with these instructions, and must be inspected before each use. To make certain that all attachments are secure and for evidence of wear, misuse of the rack or failure to observe the manufacturer's instructions as to installation, use, maintenance, and storage will void any warranties that may be implied by law. The liability of the manufacturer for any damages resulting from or relating to the rack is limited to the purchase price of merchandise demonstrated to be defective in materials or workmanship.

