

Mercedes Benz

'94-'96	C-Class	4dr. Sedan	2
'94-'95	E-Class	2dr./4dr. Sedan	2
'94-'95	E320	Wagon	2

Mercury

'91-'94	Capri	Convertible	2
'89-'97	Cougar	2dr. Sedan	2
'92-'97	Grand Marquis	4dr. Sedan	2
'95-'97	Mystique	4dr. Sedan	2
'92-'95	Sable	4dr. Sedan	2
'96-'97	Sable	4dr. Sedan	2
'96-'97	Sable	Wagon	2
'88-'94	Topaz	2dr./4dr. Sedan	2
'91-'96	Tracer LTS	2dr. Sedan	2
'97	Tracer LTS	2dr. Sedan	2
'91-'96	Tracer	4dr. Sedan	2
'97	Tracer	4dr. Sedan	2
'97	Tracer	Wagon	2

Mitsubishi

'91-'96	3000GT	Sports	2
'97	Diamante	4dr. Sedan	2
'90-'94	Eclipse	3dr. Hatch	2
'95-'97	Eclipse	Sports	3
'95-'97	Eclipse GS-T	Sports	3
'94-'97	Galant	4dr. Sedan	2
'93-'97	Mirage	2dr./4dr. Sedan	2
'97	Mirage	4dr. Hatch	1
'95-'97	Spyder	Sports	2

Nissan

'96-'97	200SX	2dr. Sports	2
'92-'94	240SX	2dr. Sedan	2
'94	240SX	Convertible	2
'90-'96	300ZX	3dr. Hatch	2
'95-'97	Maxima	4dr. Sedan	3
'95-'97	Sentra	2dr./4dr. Sedan	2

Oldsmobile

'95-'97	Bravada	Utility	3
'85-'88	Cutlass Ciera	2dr./4dr. Sedan	2
'89-'96	Cutlass Ciera	4dr. Sedan	2
'94-'96	Cutlass Supreme	Convertible	2
'90-'96	Cutlass Supreme	4dr. Sedan	3

Plymouth

'89-'95	Acclaim	4dr. Sedan	2
'89-'94	Laser	2dr. Sedan	2
'94-'97	Neon	4dr. Sedan	2

Pontiac

'92-'97	Bonneville	4dr. Sedan	2
'92-'97	Firebird	Sports	3
'95-'97	Sunfire	3dr. Hatch	3
'90-'97	Trans Sport	Van	1

Porsche

'90-'97	911	All models	3
'85-'96	928	3dr. Hatch	3
'90-'91	944	2dr. Coupe	3
'94-'96	968	3dr. Hatch	3
'97	Boxster	Convertible	3

Rover

'95-'97	Discovery	Utility	3
---------	-----------	---------	---

Saab

'90-'94	900	Convertible	3
'95-'97	900	Convertible	2
'94-'97	900	3dr./5dr. Hatch	2

Saturn

'91-'96	SC	2dr. Sedan	2
'97	SC	2dr. Sedan	2
'91-'95	SL	4dr. Sedan	2
'96-'97	SL	Sedan	2
'93-'95	SW	Wagon	2
'97	SW	Wagon	2

Subaru

'93-'97	Impreza	4dr. Sedan	2
'93-'96	Impreza	Wagon	2
'97	Impreza	Wagon	2
'90-'94	Legacy	4dr. Sedan	2
'97	Legacy	4dr. Sedan	2

Suzuki

'92-'94	Swift	4dr. Sedan	2
'92-'94	Swift	3dr. Hatch	2
'95-'97	Swift	3dr. Hatch	2

Toyota

'95-'97	Avalon	4dr. Sedan	2
'94-'97	Celica	3dr. Hatch	2
'94-'97	Celica	2dr. Sedan	2
'90-'95	MR-2	2dr. Sedan	3
'96	Paseo	3dr. Sedan	3
'97	Paseo	3dr. Sedan	3
'92-'95	Paseo	2dr. Sedan	2
'92	Supra	Sports	2
'94-'96	Supra	3dr. Hatch	2

Volkswagen

'86-'95	Cabriolet	Convertible	3
'90-'95	Corrado	3dr. Hatch	3

Volvo

'86-'93	240	Wagon	2
'87-'92	740	Wagon	2
'94-'97	850	Wagon	2
'91-'97	940/960	Wagon	2

Performance Tech Support 1(800)727-2453
9am-6pm EST Monday-Friday

Performance, Inc.
One Performance Way
Chapel Hill, NC 27514
Made in Canada
www.performancebike.com

XPORT™

Expedition Trunk Rack

Thank you for purchasing the XPORT Expedition Trunk Rack. This rack installs easily on most vehicles and will carry up to 3 bicycles. The Expedition Trunk Rack features rubber bike mounts to protect your bicycle's finish, quick release hub mechanisms for easy adjustment, and a security strap to help keep the bikes more stable on the rack.

CAUTION:

The XPORT Expedition is designed to securely attach to most cars, vans and sport utility vehicles. However, it is not intended for use with vehicles listed in the attached list.

Improper attachment or misuse of this rack may result in damage to the bicycles, your vehicle, or the vehicles behind you on the road. **IT IS THE USER'S RESPONSIBILITY TO INSURE THE SAFE AND PROPER USE OF THIS PRODUCT!**

SAFE USE OF THE XPORT EXPEDITION TRUNK RACK:

- To avoid damage to your vehicle, make sure all vehicle contact points are clean before installing the rack.
- Never place more than 3 bicycles with a maximum weight of 100 lbs. on the XPORT Expedition trunk rack.
- Inspect and check your rack, both before and after placing bicycles on the rack. The weight of the bicycles may cause the straps to loosen initially. Tighten all straps and hubs each time you inspect or use the rack.
- If a strap or hook appears worn replace it as soon as possible. Replacement hooks and straps are available by calling Performance Technical Service (1 800-727-2453).
- Check the tightness of the webbing straps at regular intervals during use, more frequently on bumpy roads and immediately if the bicycles shift position.
- Make sure that all hooks are attached to metal, not fiberglass, plastic or glass.
- Do not position the bicycles such that the tires are close to the exhaust pipe.
- The use of additional shock cords or tie down straps is recommended to prevent the bicycle wheels from turning and frames from swaying into each other.
- If you have compatibility questions please contact our Technical Service Department 1(800)727-2453.

XPORT Expedition installation:

1. Identify the upper and lower support legs. The upper support leg is narrower and has the webbing security strap attached to it.
2. Loosen the two hub assemblies by releasing the gray release lever on each of the hubs. If the hubs do not rotate easily into position, unscrew the hub cap until notched hub sections disengage. Do not remove completely.
3. Move the upper support leg to the appropriate angle that corresponds to your vehicle as shown in figure 1. Note that the XPORT name on the lower support leg should be able to be read from the rear of the vehicle.

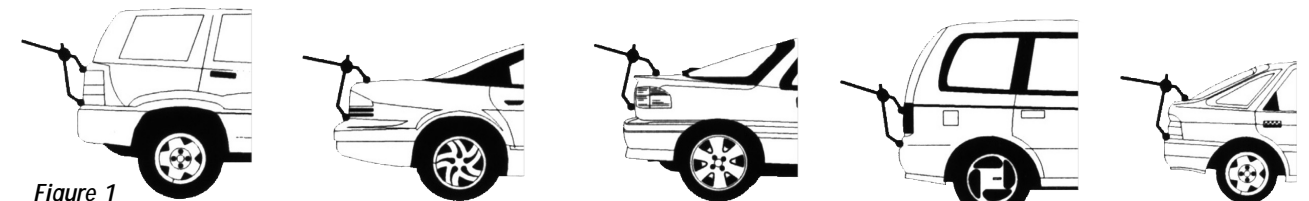


Figure 1

4. Hold the rack up to your vehicle. If the back of your vehicle has a glass window only the upper support leg may rest on glass. The lower leg must rest against a solid part of the back of the vehicle. Rotate the bike support arms such that they are at a 15-degree angle above horizontal (angled slightly upwards). See figure 2.

5. Tighten the two hub assemblies by closing the quick release lever. The support arms should be firmly in place. It may be necessary to re-tighten the hub caps before re-engaging the quick release lever.

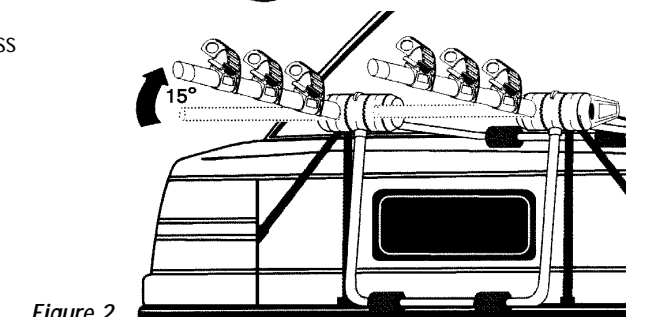


Figure 2

6. Place the XPORT Expedition on your vehicle. Attach the two upper hooks into the gap at the leading edge of the trunk or hatch lid. Adjust the length of the straps so as to correctly position the rack. See figure 3. Do not attach top hook to glass or metal trimmed glass.

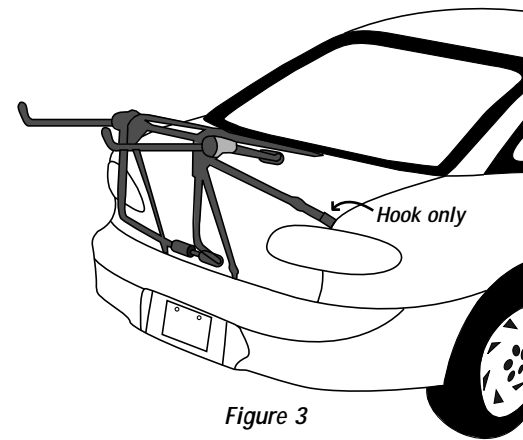


Figure 3

7. Please note that each of the lower and side straps are actually the same strap that runs through a slot under the hub mechanism. On one end of the strap is a hook with a slide buckle mechanism to adjust tension. The other end of the strap only has a hook. The hook only end goes to the side. Place that hook into position on the side edge of the trunk lid or hatch. Pull the other end of the strap toward the lower edge of the trunk lid or hatch, thereby tightening the side strap. Attach the lower hook to the bottom edge of the trunk or hatch and gently cinch up the strap so the side and lower hooks are under tension. If this location does not work on your vehicle, attach the hook to the underside of the bumper or frame member under the vehicle. **Note: All hooks must be attached to structural steel.**

8. Repeat Step 7 for the other side lower strap assembly. Make sure that none of the straps are rubbing against something sharp that could damage them. Hooks are to be attached to metal, not glass or plastic. Keep straps away from the exhaust pipe to avoid damage to them.

9. Tighten the lower straps and then tighten the upper straps. Make sure that strap tightening does not change the location or orientation of the rack.

10. Rotate the Bike Blocks such that the U shaped cradle is pointed up. The Bike Blocks may be rotated 90 degrees to accommodate a variety of bicycle frame styles. Place the bicycles in the Bike Blocks in alternating positions. (Second bike facing the opposite direction from the first). Use care to locate the crank arms in such a way to prevent damage to the vehicle or to the adjacent bike.

11. Secure the bikes onto the Bike Blocks with the rubber strap by pulling it tight around the bike frame. Make sure the hook portion of the Bike Block cradle is inserted completely into the oval of the rubber strap (see figure 4). Use care to not cut or tear the rubber strap. Do not use a Bike Block that is cut or torn. Replacement Bike Blocks are available.

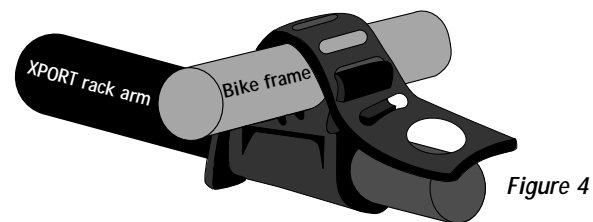


Figure 4

12. Retighten all of the straps and the hub assembly, since the load of the bicycles may have caused loosening.

13. Slide the webbing security strap (located on the upper support leg) over the top of the bikes and back through the bike frames. Thread the strap through the metal buckle and tighten. The security strap should be tight enough to keep moderate tension on the bikes, but not so tight as to cause the Bike Blocks to move.

14. Slide the security strap rubber sleeve over the metal buckle to prevent the buckle from damaging your vehicle's finish. See figure 5. **ALWAYS SECURE SAFETY STRAP WITH SLEEVE OVER THE BUCKLE!**

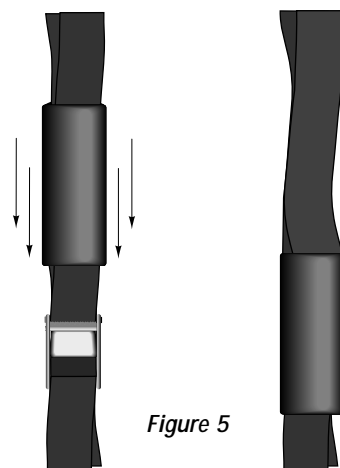


Figure 5

The following vehicles are not recommended for use with the XPORT Expedition Trunk Rack:

Reason codes:

- 1- Lower hooks cannot be attached securely
- 2- Possible deforming of the bumper
- 3- Upper hooks may damage the glass

Acura

'94-'97	Integra	3dr. Hatch	2
'94-'97	Integra	4dr. Sedan	2
'91-'97	NSX	Sports	3
'96-'97	2.3 TL/3.2 TL	4dr. Sedan	2
'97	2.2 CL	2dr. Sedan	2
'97	3.0 CL	2dr. Sedan	2
'97	3.5 CL	4dr. Sedan	2

AM General

'93-'97	Hummer	Utility	3
---------	--------	---------	---

Audi

'97	A4	4dr. Sedan	3
'95-'97	A6	4dr. Sedan	2
'95-'97	A6	Wagon	2
'97	A8	4dr. Sedan	3
'94-'97	Cabriolet	Convertible	3

BMW

'96-'97	3-Series	4dr. Sedan	3
'96-'97	3-Series	3dr. Hatch	3
'95-'96	740i	4dr. Sedan	2

Buick

'89-'96	Century	2dr./4dr. Sedan	2
'95-'96	Rivera	4dr. Sedan	2
'95-'96	Rivera	4dr. Sedan	2
'91-'97	Roadmaster	4dr. Sedan	2

Cadillac

'97	Catera	4dr. Sedan	2
'89-'93	Deville	2dr./4dr. Sedan(s)	2
'94-'96	Deville	4dr. Sedan	2
'97	Deville	4dr. Sedan	2
'89-'96	Fleetwood	2dr./4dr. Sedan(s)	2

Chevrolet

'92-'96	Camaro	Sports	2
'97	Camaro	Sports	2
'97	Cavalier	2dr./4dr. Sedan	2
'87-'96	Corsica	4dr. Sedan	2
All	Corvette	Sports	2

Chrysler

'95-'97	LHS	4dr. Sedan	1
'97	Sebring	2dr. Sedan	1
'96	Sebring	Convertible	1

Dodge

'95-'97	Avenger	4dr. Sedan	2
'97	Caravan	Van	2
'94-'97	Neon	4dr. Sedan	2
'89-'96	Spirit	4dr. Sedan	2
'95-'97	Stratus	4dr. Sedan	1

Eagle

'93-'97	Vision	4dr. Sedan	3
---------	--------	------------	---

Ford

'95-'97	Aspire	3dr. Hatch	2
'95-'96	Contour	4dr. Sedan	2
'94-'97	Contour	4dr. Sedan	2
'92-'97	Crown Victoria	4dr. Sedan	2
'92-'96	Escort	GT/3dr./5dr. Hatch	2
'91-'96	Escort	4dr. Sedan	2
'97	Escort	4dr. Sedan	2
'92-'97	Explorer	Utility	2
'88-'93	Mustang	3dr. Hatch	2
'94-'97	Mustang GT	3dr. Hatch	3
'93-'97	Probe	Sports	2
'86-'95	Taurus	4dr. Sedan	2
'96-'97	Taurus	4dr. Sedan	2
'85-'94	Tempo	2dr./4dr. Sedan	2
'89-'96	Thunderbird	2dr. Sedan	2

Geo

'89-'94	Metro	3dr./5dr. Hatch	2
'95-'97	Metro	3dr. Hatch	1
'95-'97	Metro	4dr. Sedan	1

GMC

'97	Jimmy	Utility	3
'97	Savana	Van	3
'92-'97	Suburban	Utility	3

Honda

'90-'93	Accord	2dr./4dr. Sedan	2
'94-'97	Accord	2dr./4dr. Sedan	2
'92-'95	Civic	4dr. Sedan	2
'92-'95	Civic	3dr. Hatch	2
'96-'97	Civic	3dr. Hatch	2
'95-'97	Odyssey	Wagon	3
'92-'96	Prelude	Sports	2
'97	Prelude	Sports	2

Hyundai

'92-'97	Excel	4dr. Sedan	2
'88-'95	Excel	4dr. Sedan	2

Jaguar

'97	XK8	2dr. Sedan	3
-----	-----	------------	---

Kia

'95-'97	Sephia	4dr. Sedan	2
'95-'97	Sportage	Utility	2

Lexus

'94-'97	GS300	4dr. Hatch	1
---------	-------	------------	---

Lincoln

'88-'97	Continental	4dr. Sedan	2
'90-'97	Town Car	4dr. Sedan	2

Mazda

'97	626	4dr. Sedan	1
'95-'97	Millenia	4dr. Sedan	1
'92-'95	MX-3	Sports	2
'93-'96	MX-6	2dr. Sedan	2